

HIGH PRECISION DIGITAL SNAP GAGES



NON-ROTATING SPINDLE

ABSOLUTE ENCODER, THE ORIGINAL DATA REMAINS AFTER POWER OFF

IP65 WATERPROOF

DATA OUTPUT


ONE TURN OF SLEEVE MAKES 5MM SPINDLE FEED, PRESS THE FORK, THE SPINDLE RETRACTS 3MM

ATTENTION: RECHARGEABLE BATTERY, FOR 24 HOURS CONTINUOUS WORKING

CUSTOMIZABLE MEASURING FORCE RANGE 2-12N
ATTENTION: SMALL MEASURING FORCE WILL REDUCE THE DUSTPROOF AND WATERPROOF LEVEL



3350-25

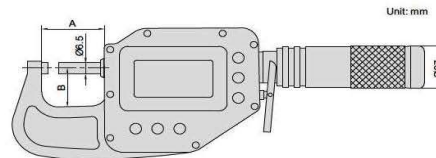

- Absolutely encoder, the original data remains after power off
- One turn of sleeve makes 5mm spindle feed
- Press the fork, the spindle retracts 3mm
- Linear ball bearings for ten million times use
- Carbide spindle and anvil
- Measuring force 7-10N
- Data output (for gages without built-in wireless)
- Button function: data output, tolerance, data preset, data hold, measuring direction change, max./min./TIR, power off time, on/off, zero, mm/inch, adjust resolution
- Power: rechargeable battery, for 24 hours continuous working
- Optional accessory: data output cable, code: 7302-SPC11, for gages without built-in wireless.
wireless receiver, code: 2134-R1 (keyboard format), 2134-R2 (serial port format), for gages with built-in wireless.

wireless receiver 2134-R1, 2134-R2 (optional)



Adjustable resolution: 0.0002mm/0.00001*
0.001mm/0.00005*
0.01mm/0.0005*

Code	Range	Accuracy	Repeatability	Measuring faces		A	B	Wireless
				Flatness	Parallelism			
3350-25*	0-25mm/0-1"	1.4µm	0.6µm	0.5µm	1µm	38mm	24mm	no
3350-25WL*								built-in wireless
3350-50*	25-50mm/1-2"	1.6µm	1µm	0.5µm	1µm	63mm	28mm	no
3350-50WL*								built-in wireless
3350-75*	50-75mm/2-3"	1.8µm	1µm	0.5µm	1µm	88mm	45mm	no
3350-75WL*								built-in wireless
3350-100*	75-100mm/3-4"	2µm	1µm	0.5µm	1µm	113mm	57mm	no
3350-100WL*								built-in wireless


*Supplied with manufacturer inspection certificate

TELEFON: 604 179 888
TELEFON: 604 186 202
OFFICE: Tichá 444
742 74, Tichá



Tichá 534
742 74, Tichá

rozumek@mitoro.cz
rozumkova@mitoro.cz
IČ: 05370264
DIČ: CZ7656025564

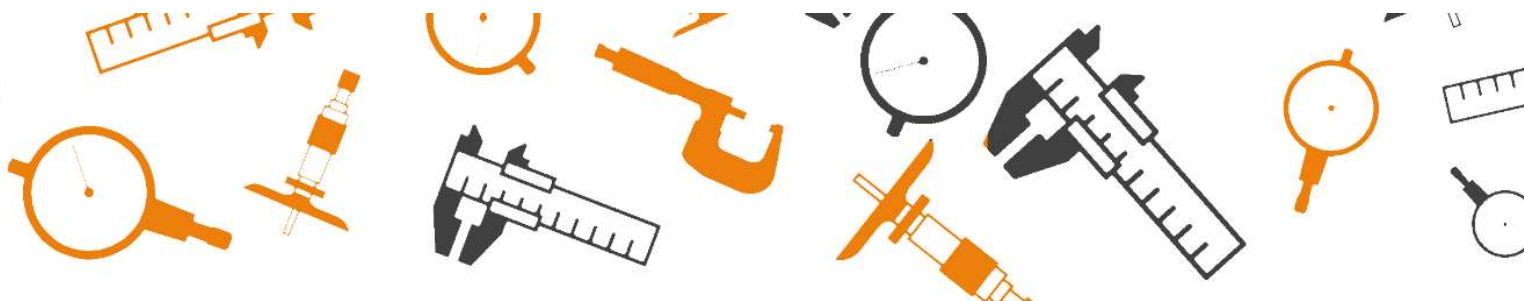

**ABSOLUTNÍ NOVINKA VYSOCE PŘESNÉ MIKROMETRY V ROZAHU
MĚŘENÍ**

0-25, 25-50, 50-75 A 75-100 mm.

PARAMETRY MIKROMETRŮ:

PŘESNOST 1,4 μm (0-25mm), OPAKOVATELNOST 0,6 μm

ROVNOBĚŽNOST MĚŘÍCÍCH PLOCH 1 μm .

NYNÍ, LZE PŘEDNOSTNĚ OBJEDNAT ZA TYTO ZAVÁDĚCÍ CENY !

obj.č.3350-25 rozsah 0-25 mm cena 10.599,- Kč bez DPH

obj.č.3350-50 rozsah 25-50 mm cena 11.470,- Kč bez DPH

obj.č.3350-75 rozsah 50-75 mm cena 13.170,- Kč bez DPH

obj.č.3350-100 rozsah 75-100 mm cena 14.560,- Kč bez DPH

TELEFON: 604 179 888

TELEFON: 604 186 202

OFFICE: Tichá 444
742 74. Tichá



Tichá 534
742 74, Tichá

rozumek@mitoro.cz
rozumkova@mitoro.cz

IČ: 05370264
DIČ: CZ7656025564